


# Air curtain wiring diagram

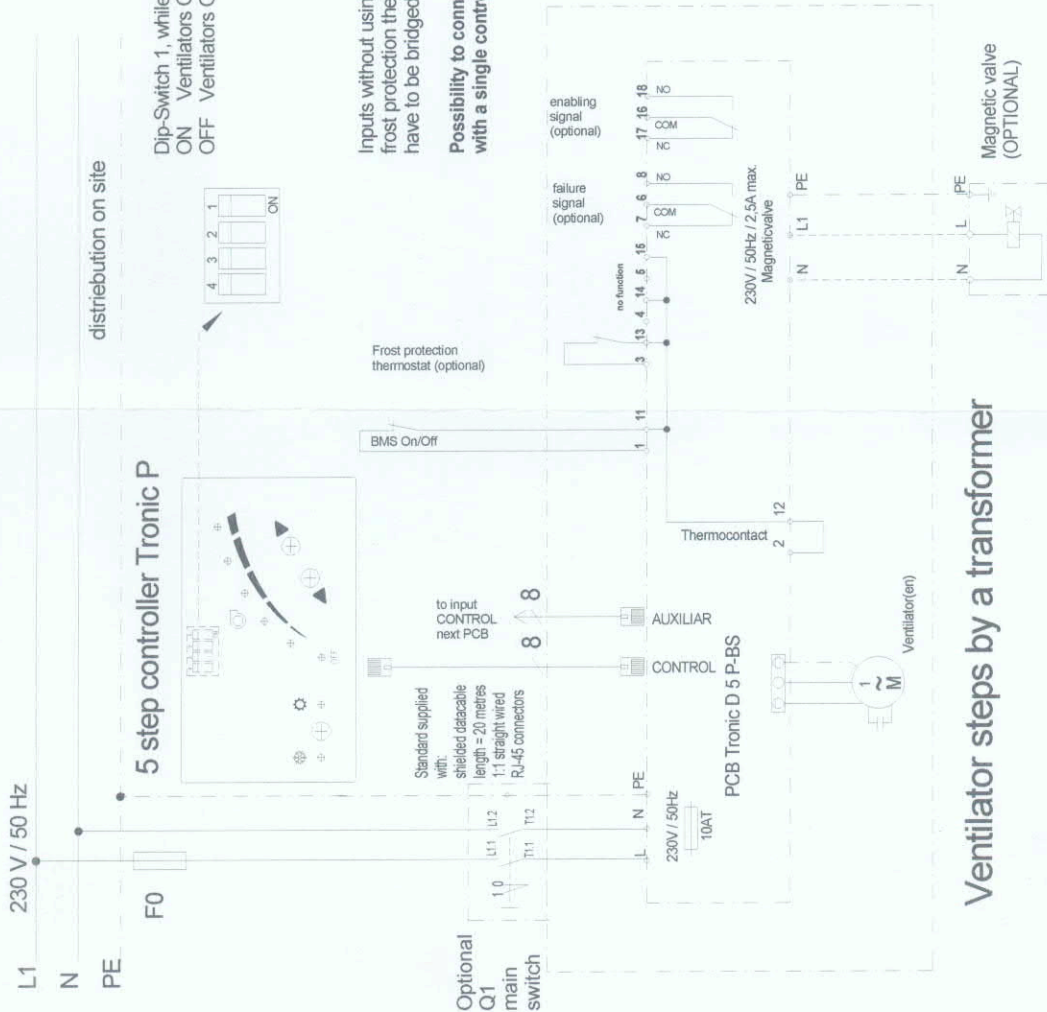

distribution on site

5 step controller Tronic P

Dip-Switch 1, while WINTER function  
 ON Ventilators OFF = Magnetic valve closed  
 OFF Ventilators OFF = Magnetic valve opened

Inputs without using like a thermocontact, frost protection thermostat or BMS release have to be bridged!

Possibility to connect max. 12 PCB's in parallel with a single controller.

Supplied by SKS

If it is necessary to connecting more than one air curtain on a single controller, please contact and tell HVAC before ordering.

A magnetic valve or circulation pump (max. 2,5A) can be connected directly on the PCB.

A shielded data cable (8 poles, 1:1 wired) to connect air curtain and controller with RJ-45 connector is Plug&Play supplied. Standard length is 20 meters, other lengths available on request.

technical changes reserved

getekend gewijzigd	la	01.12.2008	Materiaal	Schaal
			Pos	Deel
			van	Groep
			Bouwdatum	
Klant tekening nummer:				
Naam				
Klant				
Tronic P engl. 081201				
Blz				
1 van 1				



Ventilator steps by a transformer